

Measurement and control solutions

Zelio Control

Catalogue

March 2009



Schneider
 **Electric**



The A to Z of temperature control in all simplicity

Superior in quality, the new **Zelio Control REG** relays are a key component for a temperature regulation solution (solid-state relays, electromechanical relays, PLCs, variable speed drives, displays). Featuring Modbus communication and advanced functions as standard, they offer excellent simplicity of installation and use.

Contents

Presentation

Combine simplicity, performance and economy	2
Opt for an efficient solution	4

Technical characteristics

Selection guide	6
Presentation	8
Characteristics	11
References	12
Dimensions	16
Connections	17

Make the most of your energy



Combine simplicity, performance and economy

Zelio Control REG relays provide a temperature control solution within the following domains: industrial machines, HVAC, packaging, textile.

The temperature control relays are available in 3 formats (DIN standards).



24x48mm > Optimised size and performance

- Temperature regulation at a reduced price
- Small size front face

48x48mm > Excellent size/ performance ratio

- Wide variety of functions combined with excellent characteristics
- Suited to a wide range of applications
- Very functional

96x48mm > Performance, user-friendliness and design considerations

- Elegant design enabling perfect integration on front face of machines
- Large buttons for ease of use
- Very functional

100% legibility

High luminosity LED display providing excellent clarity whatever the lighting conditions.

> No options or additional costs, everything included for the same price!

Modbus communication and advanced functions integrated as standard.

- Integrated Modbus communication port for easy data exchange with other automation products.
- Advanced functions
 - PID,
 - ramps,
 - fuzzy logic to avoid overshooting,
 - auto-tuning,
 - soft start, depending on model,
 - automatic or manual operating mode, depending on model.



> Simplicity of installation and use

Optimisation of mounting and parametering times

- Common software for all products in the temperature relay range (freely downloadable from schneider-electric.com).
- A single cable enables connection to both a computer and PLCs.
- Simple adjustment of parameters.
- Saving of configurations.
- Compatible with a wide range of sensors available on the market.



ZelioControl Soft

+70%

time savings for parametering.

90mm

Shallow depth of product reduces size of enclosures.



Opt for an efficient solution!




The Schneider Electric advantage: we offer a complete solution, from solid-state relays to controllers, that fully lives up to your expectations. Present in 190 countries, you can be assured of service and product availability wherever you are.

> Simple integration in all types of application


Complete installation



Simple installation

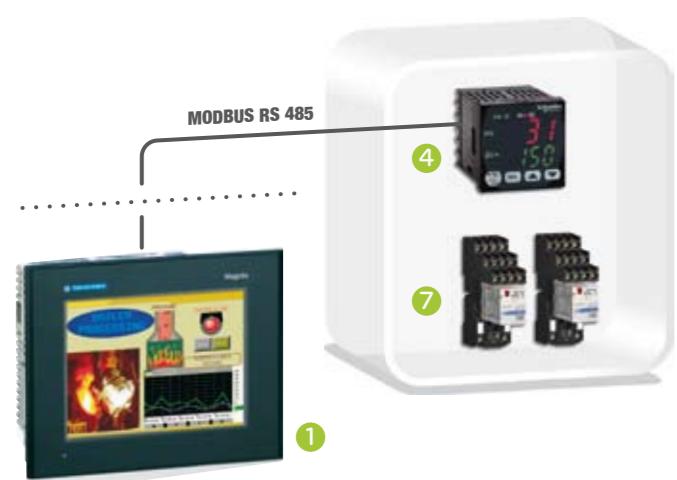

- 1 Display unit **Magelis XBT GT**
- 2 Programmable controllers **Twido TWD LC...**
- 3 Temperature control relay **Zelio REG 24**
- 4 Temperature control relay **Zelio REG 48**
- 5 Solid-state relay **Zelio Relay SSR...**
- 6 Variable speed drive **Altivar 12**
- 7 Electromechanical relay **Zelio Relay RUM...**
- 8 Illuminated indicator bank **Harmony XVB**

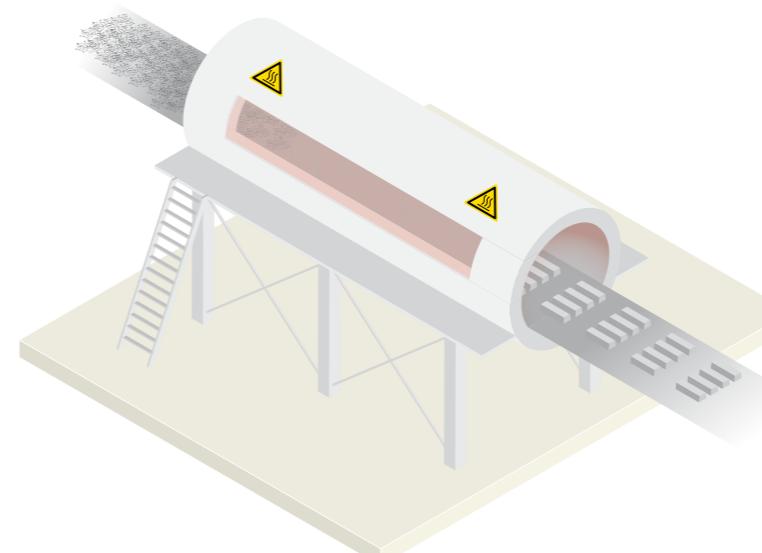

Industrial ovens

- Modbus communication
- 2 alerts

> Continuous process control



Horticulture/Agriculture

- Solid-state relay interfacing
- > **Noise free**

- Variable speed drive interfacing
- > **Progressive ventilation**

Zelio Control - measurement and control relays

REG temperature control relays

Size (mm) - Standard

24 x 48 – 1/32 DIN



Inputs	Thermocouple PT 100 probe - Voltage/current, depending on model
Sampling time	500 ms
Communication on Modbus bus	Yes, except for REG 24PTP1A•HU
Dust and watertight front panel	IP66 (conforming to NEMA-4X)
Functions	Hysteresis Yes PID Yes Auto-tuning Yes Fuzzy logic Yes Ramps 8 steps Controlled start-up No Operating mode Automatic
Alarm outputs	1 on REG 24PTP1A•HU only
Display	7 segment LED, 4 digits Operating indicators 1 4
Process Outputs (number - type)	1 relay — 2 relays — 1 solid state relay — 1 relay + 1 solid state relay — 1 current (4-20 mA) — 1 solid state relay + 1 current (4-20 mA) —
Supply voltage	~ 100...240 V ~ 24 V REG 24P••••HU REG 24P••••LU
Temperature control relay type	REG 24
Page	12

48 x 48 – 1/16 DIN



Universal

200 ms

Yes, except for **REG 48PUNL1•HU**

Yes

Yes

Yes

Yes

16 steps

Yes

Automatic and manual

2

2, red and green, configurable

5



REG 48PUN••HU

REG 48PUN••LU

REG 48

96 x 48 – 1/8 DIN



Universal

200 ms

Yes, except for **REG 96PUNL1•HU**

Yes

Yes

Yes

16 steps

Yes

Automatic and manual

3

2, red and green, configurable

6



REG 96PUN••HU

REG 96PUN••LU

REG 96

12

12

Zelio Control - measurement and control relays

REG temperature control relays



24 x 48 mm size



48 x 48 mm size



96 x 48 mm size

Presentation

Product

The range of **REG** temperature control relays provides a solution with 3 product sizes (DIN standard):

- 24 x 48 mm (1/32 DIN),
- 48 x 48 mm (1/16 DIN),
- 96 x 48 mm (1/8 DIN).

The range includes 40 models which offer the following characteristics (depending on model):

- Supply voltage $\sim 100\ldots240$ V or ≈ 24 V.
- Input: Thermocouple PT 100 probe-Voltage/current or universal, depending on model.
- Configurable display: red and green display colours and possibility of flashing display in the event of an alarm.
- 1, 2 or 3 alarm outputs, depending on model.
- Advanced functions, depending on model.

Operation

■ One or two dedicated outputs for heating, cooling or heating/cooling of processes based on PID algorithms.

■ Advanced functions:

- ramps,
- fuzzy logic to avoid over/under temperature,
- auto-tuning,
- controlled start-up, depending on model.
- automatic or manual operating mode, depending on model.

Applications

REG temperature control relays are aimed at system integrators and machine manufacturers; they provide a solution for temperature control in the following applications: industrial machines, HVAC, packaging, textile industry.

Application examples:

- Boilers and furnaces,
- Extrusion lines,
- Plastic and rubber injection presses,
- Thermo-forming,
- Production of synthetic fibres and polymerisation,
- Food and drinks processing lines,
- Moulding presses,
- Environmental test chambers, overhead furnaces and test benches,
- UV & Laser technologies,
- Maintaining the temperature of a colour bath,
- Cold rooms,
- Paint booths,
- Horticultural and livestock farms.



ZelioControl Soft software
can be downloaded from www.schneider-electric.com


Software configuration

"**ZelioControl Soft**" software is used to configure the parameter settings of **REG** temperature control relays (except for REG 24PTP1A•HU).

- This software is available free of charge and can be downloaded from the following web site: www.schneider-electric.com
- It runs on a PC, with Windows 98, XP or Vista operating system.
- It allows modification of parameter settings, saving and downloading of configurations.

Zelio Control - measurement and control relays


REG temperature control relays

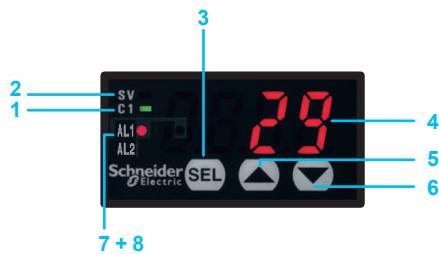

Description

24 x 48 size – 1/32 DIN standard

- 1 C1 : indicator showing output 1 ON.
 - 2 SV : set-point value indicator; on = SV, off = PV present value indicator, if parameter entry
 - 3 SEL : selector button.
 - 4 Display of parameter value entered, 4 red digits, 10 mm high
 - 5 UP (increment) arrow.
 - 6 DOWN (decrement) arrow.
 - 7 AL1 : relay output alarm on REG 24PTP1A●HU only.
 - 8 AL2 : Modbus alarm.

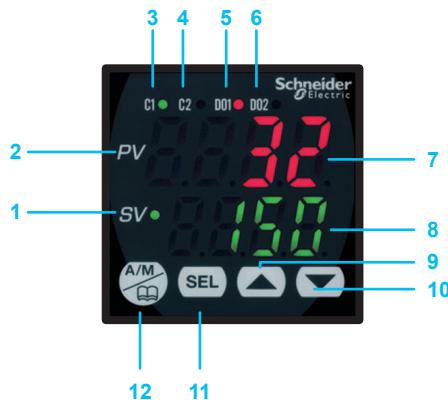

48 x 48 size - 1/16 DIN standard

- 1** SV : set-point value indicator.
 - 2** PV : present value indicator.
 - 3** C1 : indicator showing output 1 ON.
 - 4** C2 : indicator showing output 2 ON.
 - 5** D01 : Alarm 1 output ON.
 - 6** D02 : Alarm 2 output ON.
 - 7** Display of process value, 4 red digits, 12 mm high
 - 8** Display of parameter value entered, 4 green digits, 10 mm high
 - 9** UP (increment) arrow.
 - 10** DOWN (decrement) arrow.
 - 11** SEL : selector button.
 - 12** A/M : automatic/manual mode or configuration key.



96 x 48 size – 1/8 DIN standard

- 1** SV : set-point value indicator.
 - 2** PV : present value indicator.
 - 3** C1: indicator showing output 1 ON.
 - 4** C2 : indicator showing, output 2 ON.
 - 5** D01 : Alarm 1 output ON.
 - 6** D02 : Alarm 2 output ON.
 - 7** D03 : Alarm 3 output ON.
 - 8** Display of process value, 4 red digits, 12 mm high
 - 9** Display of parameter value entered, 4 green digits, 10 mm high
 - 10** UP (increment) arrow.
 - 11** DOWN (decrement) arrow.
 - 12** A/M : automatic/manual mode or configuration key.
 - 13** SEL : selector button.

Zelio Control - measurement and control relays


REG temperature control relays

Examples of architectures with communication on Modbus serial port

Control relays **REG 24**, **REG 48** and **REG 96** (1) have a communication port for data exchange and parameter entry on the Modbus bus.


These temperature control relays can be incorporated in intelligent architectures supervised by Magelis terminals or controlled by PLCs (Twido, M340 or Premium) for the exchange and transmission of data such as set-point values, present values and alarms.

REG temperature control relays supervised by a Magelis compact terminal

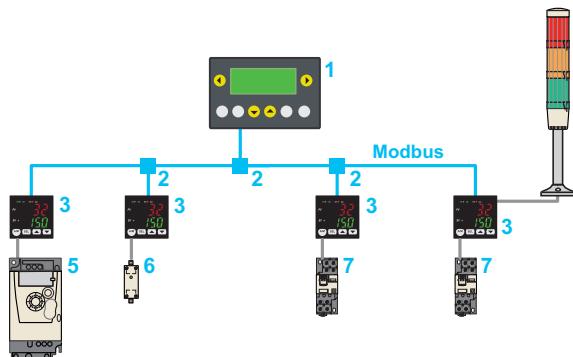

- 1 Compact terminal **XBT N**, master on the Modbus network.
- 2 Junction box **TWD XCATR3RJ**.
- 3 Temperature control relay **REG 24/48/96**.
- 4 Alarm: illuminated indicator bank **XVM** (2).
- 5 Current output: variable speed drive **ATV 12H075M2** (3).
- 6 Solid state relay output **SSR**.
- 7 Electromechanical relay output **RXM 2AB2●**.

REG temperature control relays, controlled by PLCs

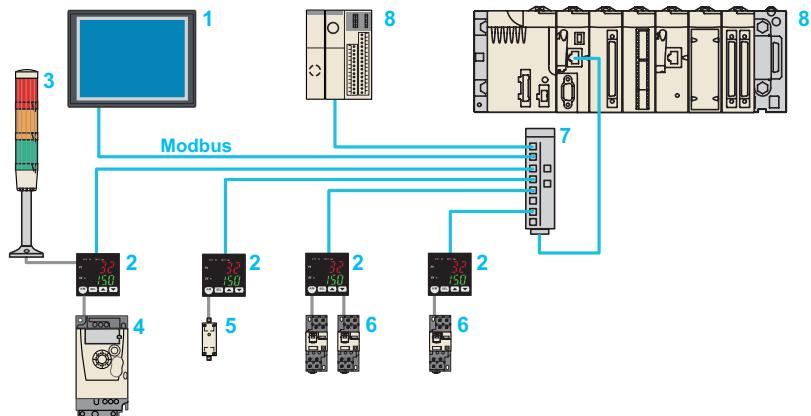

- 1 Graphic terminal **XBT G**, slave on the Modbus network, for regular reading of values, recording of curves (ramps), changes in presets.
- 2 Temperature control relay **REG 24/48/96**.
- 3 Alarm: illuminated indicator bank **XVM** (2).
- 4 Current output: variable speed drive **ATV 12H075M2** (3).
- 5 **SSR** solid state relay output.
- 6 **RXM 2AB2●** electromechanical relay output.
- 7 Modbus hub **LU9 GC3**.
- 8 PLCs with sequential processing of instructions: Twido programmable controller, or Modicon M340 automation platform, masters on the Modbus network.

(1) Except on **REG 24PTP1A●HU**, **REG 48PUNL1●HU** and **REG 96PUNL1●HU**.

(2) Illuminated indicator bank **XVM**, preassembled and pre-wired with "buzzer" incorporated in the base, please see our "Control and signalling components" catalogue

(3) Variable speed drive **ATV 12H075M2**: frequency converter for 3-phase asynchronous motors, 200...240 V from 0.18 kW to 4 kW.

Environment characteristics						
Size (mm) - Standard		24 x 48 - 1/32 DIN	48 x 48 - 1/16 DIN	96 x 48 - 1/8 DIN		
Conforming to standards		EMC EN 61326-1, LVD EN 61010-1				
Product certifications		cURus (873), CSA C22.2 n° 24-93, Gost				
Product marking		CE				
Ambient air temperature around the device	Operation	°C	- 10...+ 50			
	Storage	°C	- 20...+ 60			
Relative humidity		90 % without condensation				
Altitude	Operation	m	2000			
	Storage	m	3000			
Vibration resistance		1 gn (10...70 Hz)				
Shock resistance		5 gn				
Input type	PT100 probe		Yes	Yes		
	Thermocouple J, K, R, B, S, T, E, N, PLII		Yes	Yes		
	Voltage/current	V	1...5	0...5, 1...5, 0...10, 2...10, 0...0.100		
		mA	4...20	0...20, 4...20		
Precision of information displayed	%FS	0.5	0.3	0.3		
Number of Process outputs		1	1 or 2	1 or 2		
Sampling time	ms	500	200	200		
Power supply						
Voltage range	~ 100...240 V	V	85...264			
	~ 24 V	V	21.6...26.4			
Power consumption	~ 100...240 V	VA	6 to 100 8 to 240	12		
	~ 24 V	VA	8	12		
Communication on Modbus bus						
Serial port	Number and type		1 x RS 485			
Flow rate	Kbits/s	9600 and 19 200				
Isolation between internal circuit and serial port		Non isolated				
Communication protocol		Modbus slave RTU, half duplex				
Built-in functions						
Hysteresis		Yes	Yes	Yes		
PID		Yes	Yes	Yes		
Auto-tuning		Yes	Yes	Yes		
Fuzzy logic		Yes	Yes	Yes		
Ramps	Steps	8	16	16		
Controlled start-up		No	Yes	Yes		
Operating mode		Automatic	Automatic and manual	Automatic and manual		
Output characteristics						
Relays		SPDT ~ 220 V, --- 30 V/3A	SPST ~ 220 V, --- 30 V/3A			
Solid state relay		--- 24 V, 20 mA, 850 Ω				
Current		4...20 mA, load resistance 600 Ω max	4...20 mA, load resistance 600 Ω max / 0...5 V, 1...5 V, 0...10 V, 2...10 V 10 KΩ min			
Alarm outputs	SPDT	~ V	100-220, load capacity 1 A	100-220, load capacity 3 A		
		~ V	30, load capacity 1 A	30, load capacity 3 A		

Zelio Control - measurement and control relays

REG temperature control relays



REG 24PTP1****
REG 24PUJ1 ***

Temperature control relays

24 x 48 size – 1/32 DIN standard

Input type	Supply voltage	Number and type of outputs	Alarm	Communication on Modbus bus	Reference	Weight kg
Thermocouple PT100 probe	~ 100/240 V	1 relay	No	Yes	REG 24PTP1RHU	0.200
		1 relay	1	No	REG 24PTP1ARHU	0.200
		1 solid state relay	No	Yes	REG 24PTP1LHU	0.200
		1 solid state relay	1	No	REG 24PTP1ALHU	0.200
		1 current (4-20 mA)	No	Yes	REG 24PTP1JHU	0.200
Voltage/current	~ 24 V	1 relay	No	Yes	REG 24PTP1RLU	0.200
		1 solid state relay	No	Yes	REG 24PTP1LLU	0.200
		1 current (4-20 mA)	No	Yes	REG 24PTP1JLU	0.200
	~ 100/240 V	1 relay	No	Yes	REG 24PUJ1RHU	0.200
		1 solid state relay	No	Yes	REG 24PUJ1LHU	0.200
	~ 24 V	1 relay	No	Yes	REG 24PUJ1RLU	0.200
		1 solid state relay	No	Yes	REG 24PUJ1LLU	0.200



REG 48PUN****

48 x 48 size – 1/16 DIN standard

Universal	~ 100/240 V	1 relay	2	Yes	REG 48PUN1RHU	0.300
				No	REG 48PUN1RHLU	0.300
		2 relays	2	Yes	REG 48PUN2RHU	0.300
		1 solid state relay	2	Yes	REG 48PUN1LHU	0.300
				No	REG 48PUN1LLU	0.300
		1 relay + 1 solid state relay	2	Yes	REG 48PUN2RLHU	0.300
		1 current (4-20 mA)	2	Yes	REG 48PUN1JHU	0.300
		1 solid state relay + 1 current (4-20 mA)	2	Yes	REG 48PUN2LJHU	0.300
	~ 24 V	1 relay	2	Yes	REG 48PUN1RLU	0.300
		2 relays	2	Yes	REG 48PUN2RLU	0.300
		1 solid state relay	2	Yes	REG 48PUN1LLU	0.300
		1 relay + 1 solid state relay	2	Yes	REG 48PUN2RLLU	0.300
		1 current (4-20 mA)	2	Yes	REG 48PUN1JLU	0.300
		1 solid state relay + 1 current (4-20 mA)	2	Yes	REG 48PUN2LJLU	0.300



REG 96PUN****

96 x 48 size – 1/8 DIN standard

Universal	~ 100/240 V	1 relay	3	Yes	REG 96PUN1RHU	0.300
				No	REG 96PUN1RHLU	0.300
		2 relays	3	Yes	REG 96PUN2RHU	0.300
		1 solid state relay	3	Yes	REG 96PUN1LHU	0.300
				No	REG 96PUN1LLU	0.300
		1 relay + 1 solid state relay	3	Yes	REG 96PUN2RLHU	0.300
		1 current (4-20 mA)	3	Yes	REG 96PUN1JHU	0.300
		1 solid state relay + 1 current (4-20 mA)	3	Yes	REG 96PUN2LJHU	0.300
	~ 24 V	1 relay	3	Yes	REG 96PUN1RLU	0.300
		2 relays	3	Yes	REG 96PUN2RLU	0.300
		1 solid state relay	3	Yes	REG 96PUN1LLU	0.300
		1 relay + 1 solid state relay	3	Yes	REG 96PUN2RLLU	0.300
		1 current (4-20 mA)	3	Yes	REG 96PUN1JLU	0.300
		1 solid state relay + 1 current (4-20 mA)	3	Yes	REG 96PUN2LJLU	0.300

Zelio Control - measurement and control relays

REG temperature control relays

Separate components for temperature control relays (1)

Description	For use with control relay size	Sold in lots of	Unit reference	Weight g
Bracket for mounting on \square rail	24 x 48	4	REG 24PSOC	14.93
Terminal block cover	48 x 48	2	REG 48PCOV	7.77
	96 x 48	2	REG 96PCOV	13.17

Miniature plug-in relays with lockable test button and LED

2 C/O contacts - Thermal current (I_{th}): 12 A



RXM 2AB2xx

Control circuit voltage V	Sold in lots of	Unit reference	Weight kg
... 12	10	RXM 2AB2JD	0.037
... 24	10	RXM 2AB2BD	0.037
... 48	10	RXM 2AB2ED	0.037
... 110	10	RXM 2AB2FD	0.037
~ 24	10	RXM 2AB2B7	0.037
~ 48	10	RXM 2AB2E7	0.037
~ 120	10	RXM 2AB2F7	0.037
~ 230	10	RXM 2AB2P7	0.037

Solid state relays with 1 N/O contact, for mounting on \square rail



SSR DCDS10A1

Switching	Voltage range	Load current (A)	References	Weight kg
	Input (V)	Output (V)		
SCR output				
Zero voltage	... 4...32	~ 24...280	SSR DCDS10A1	0.272
		10	SSR DCDS20A1	0.272
		20	SSR DCDS30A1	0.272
		30	SSR DCDS45A1	0.482
		45		

ATV12 variable speed drives with heat sink

For more information, please consult our "Altivar 12 variable speed drives" catalogue



ATV 12H075M2

Motor Power indicated on rating plate	Network			Altivar 12			Reference	Weight kg	
	Max. line current at U1	Apparent power at U1	Pro-spective max. line Isc at U2	Max. continuous output current (In) at U2	Max. transient current for 60 s	Power dissipated at max. output current (In)			
kW HP	A	A	kVA	kA	A	W			
Single-phase supply voltage: 100...120 V 50/60 Hz									
0.75 1	18.9	15.7	3.3	1	4.2	6.3	48	ATV 12H075M2	1.300
Single-phase supply voltage: 200...240 V 50/60 Hz									
0.75 1	10.2	8.5	3.5	1	4.2	6.3	44	ATV 12H075M2	0.800
3-phase supply voltage: 200...240 V 50/60 Hz									
0.75 1	6.3	5.3	2.2	5	4.2	6.3	41	ATV 12H075M3	0.800

(1) To be ordered separately.

Zelio Control - measurement and control relays

REG temperature control relays



XBTN400/N401



XBT GT630

Magelis terminals for supervision on Modbus						
Description	Downloadable exchange protocol	Compatible with PLC types	Supply voltage	Screen type	Reference	Weight kg
Compact terminals						
Terminals with 4 lines of 20 characters matrix screen	Modbus	Twido, Nano, TSX Micro, Premium, Modicon M340	— 5 V by terminal port on PLC	LCD backlit green (122 x 32 pixels)	XBT N400	0.360
		Twido, Nano, TSX Micro, Premium, Momentum, Quantum, Modicon M340	— 24 V external source	LCD backlit green (122 x 32 pixels)	XBTN410	0.380
		TeSys U motor starters Altivar variable speed drives	— 24 V external source	LCD backlit green, orange and red (122 x 32 pixels)	XBTN401	0.380
Colour graphic terminal with tactile screen						
Multifunction terminal 12.1" with TFT screen	Modbus (RS 485) on RJ45 connector	Twido, Nano, TSX Micro, Premium, Modicon M340	— 5 V by terminal port on PLC	LCD backlit green	XBT GT6330	3.000
Description	Compatibility	Physical link	Connector type	Protocol	Reference	Weight kg
Cable for direct connection of XBT N terminals to PLCs length 2.5 m	Twido, Nano, TSX Micro, Premium	RS 485	Mini-Din	Modbus	XBT Z9780	—
	Modicon M340	RS 485	RJ45	Modbus	XBT Z9980	—

Zelio Control - measurement and control relays

REG temperature control relays



TWD LC•E 40DRF



TSX CUSB 485



TWD XCA ISO



TWD XCA T3RJ



ABL 8MEM24003/24006

Twido programmable controllers

Controllers

Item	No. of discrete I/O	Supply voltage	Reference	Weight kg
Compact base controllers with integrated Ethernet port Transparent Ready Class A10	24 ~ 24 V inputs 14 relay outputs 2 --- 24 V solid state relay outputs	~ 100...240 V --- 24 V	TWD LCAE 40DRF TWD LCDE 40DRF	0.525 0.525

Tap-off, adapter and connection components for RS 485 serial link

Item	Description	Length (m)	Reference	Weight kg
USB/RS485 converter	Allows connection of the REG temperature control relay's built-in port to the USB port on the programming PC (for software configuration) To be used with RJ45 cable/free wires	0.4	TSX CUSB 485	0.144
RS 485 cable To be used with the USB/RS485 converter	Fitted with a mini-DIN connector and an RJ45 connector	2.5	TSX CRJMD 25	0.150
Tap isolation box Screw terminal block for main cable 2 x RF45 for tap-off	RS 485 line isolation (1) Line end adapter (RC 120 Ω, 1nF) Line pre-polarisation (2 R 620Ω) Power supply --- 24 V (screw terminals) Mounting on 35 mm U rail	—	TWD XCA ISO	0.100
Tap junction box 1 x RJ45 for main cable 2 x RF45 for tap-off	Line end adapter (RC 120 Ω, 1nF), Line pre-polarisation (2 R 620Ω) Mounting on 35 mm U rail	—	TWD XCA T3RJ	0.080
Modbus RS 485 cables	1 RJ45 connector and 1 end with free wires	1	TWD XCA FJ010	0.060

Tap-off, adapter and connection components for RS 485 serial link

Item	Description	Length (m)	Reference	Weight kg
Modbus hub	10 RJ45 connectors and one screw terminal	—	LU9 GC3	0.500
Modbus RS 485 cables	1 RJ45 connector and 1 end with free wires	3	VW3 A8 306 D30	0.150
	1 RJ45 connector at each end	0.3	VW3 A8 306 R03	0.025
		1	VW3 A8 306 R10	0.060
		3	VW3 A8 306 R30	0.130

Phaseo regulated switch mode power supplies with automatic reset

Input voltage	Secondary		Reference	Weight kg	
	Output voltage	Nominal power	Nominal current		
Single-phase (N-L1) or 2-phase (L1-L2) connection					
100...240 V -15 %, + 10 % 50/60 Hz	--- 24 V	7 W	0.3 A	ABL 8MEM24003	0.100
		15 W	0.6 A	ABL 8MEM24006	0.100
		30 W	1.2 A	ABL 8MEM24012	0.195
		60 W	2.5 A	ABL 7RM24025	0.255

(1) Line isolation recommended for distances > 10 m.



Dimensions

Zelio Control - measurement and control relays



REG temperature control relays

24 x 48 size – 1/32 DIN standard


Panel mounting: bracket supplied

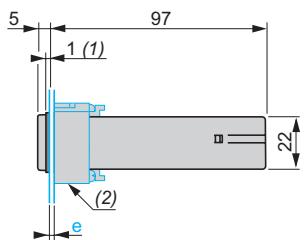

Panel cut-out

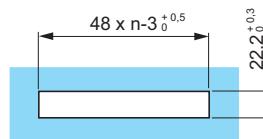
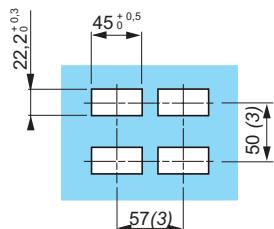


Mounting on U rail with accessory REG 24PSOC (to be ordered separately, see page 13)


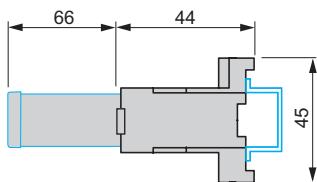


48 x 48 size – 1/16 DIN standard

Panel mounting: bracket supplied


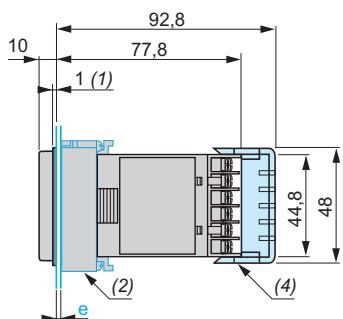


Panel cut-out

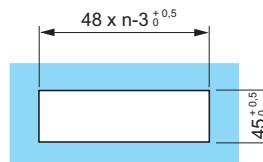
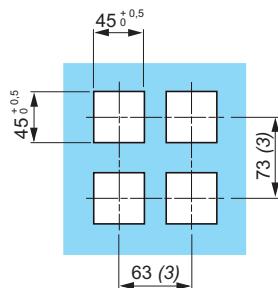


96 x 48 – 1/8 DIN standard

Panel mounting: bracket supplied

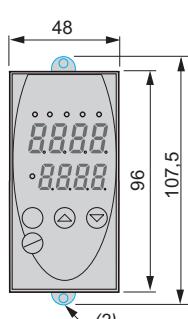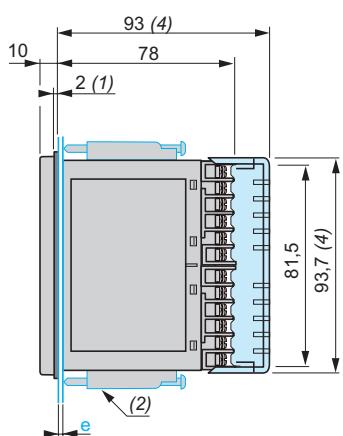

Panel cut-out

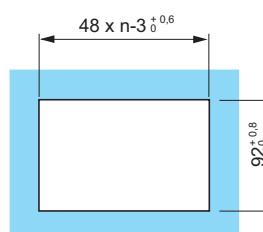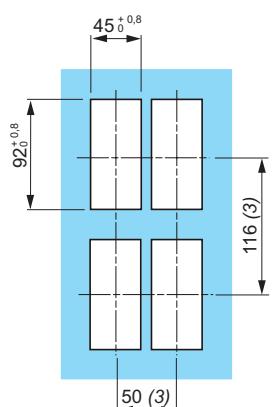

(1) Seal

(2) Fixing brackets supplied with REG temperature control relays.

(3) Minimum value.


(4) Terminal block cover, to be ordered separately, see page 13.

Zelio Control - measurement and control relays

REG temperature control relays


~ 100...240 V

REG 24PTP1RHU, REG 24PTP1ARHU, REG 24PTP1LHU,
REG 24PTP1ALHU, REG 24PTP1JHU, REG 24PUJ1RHU,
REG 24PUJ1LHU

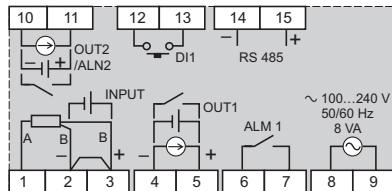


~ 24 V


REG 24PTP1RLU, REG 24PTP1LLU, REG 24PTP1JLU, REG 24PUJ1RLU,
REG 24PUJ1LLU

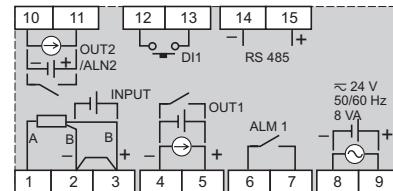


REG 48PUN1RHU, REG 48PUN1LHU, REG 48PUN2RHU,
REG 48PUN1LHU, REG 48PUN1LJHU, REG 48PUN2RLHU,
REG 48PUN1JHU, REG 48PUN2LJHU

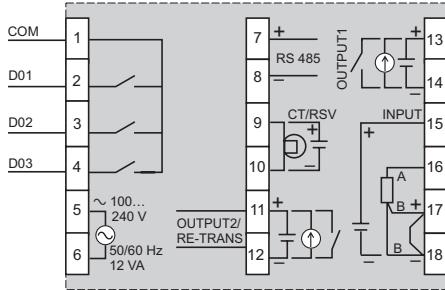


REG 48PUN1RLU, REG 48PUN2RLU, REG 48PUN1LLU,
REG 48PUN2RLLU, REG 48PUN1JLU, REG 48PUN2LJLU

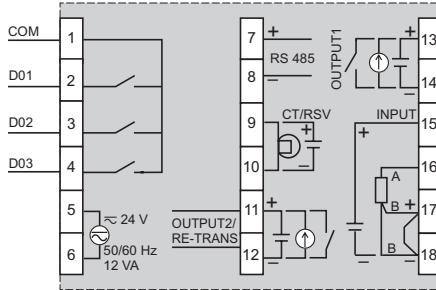

REG 96PUN1RHU, REG 96PUN1LHU, REG 96PUN2RHU,
REG 96PUN1LHU, REG 96PUN1LJHU, REG 96PUN2RLHU,
REG 96PUN1JHU, REG 96PUN2LJHU

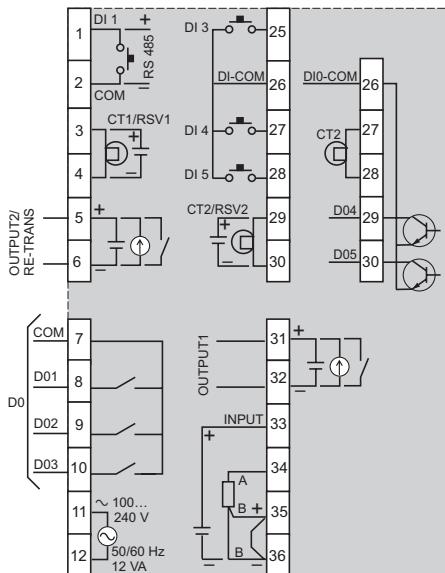

REG 96PUN1RLU, REG 96PUN2RLU, REG 96PUN1LLU,
REG 96PUN2RLLU, REG 96PUN1JLU, REG 96PUN2LJLU

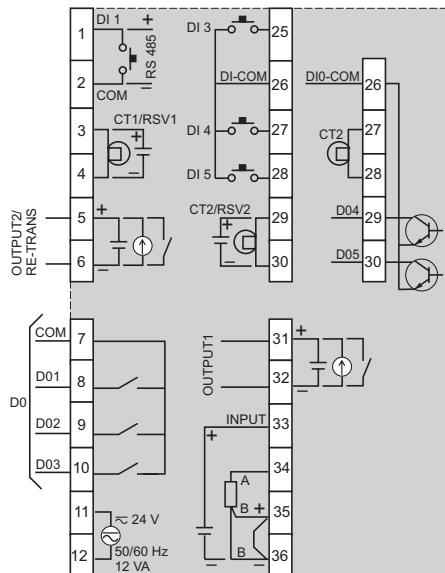

Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier
F-92500 Rueil-Malmaison
France

www.schneider-electric.com

Due to evolution of standards and equipment, the characteristics indicated in texts and images of this document do not constitute a commitment on our part without confirmation.

Design: Schneider Electric
Photos: Schneider Electric
Printed by: